


Hot air blower

COMPACT

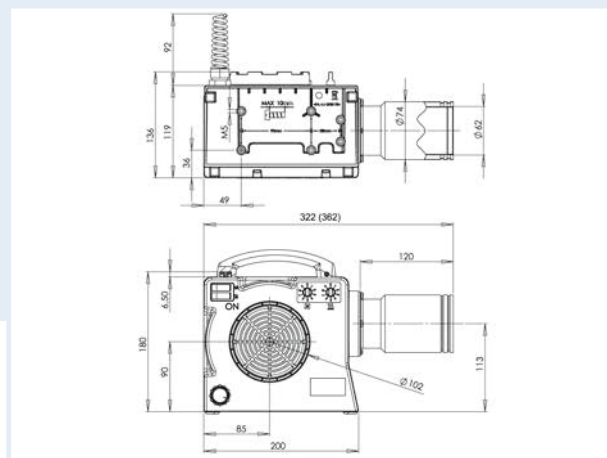

Technical data

Order no.		5102586	5102602	5102581	5102605	5102599
Voltage	VAC	230	230	230	400	400
Capacity	W	2300	3100	3700	4700	6100
Frequency	Hz	50/60	50/60	50/60	50/60	50/60
Max. temperature	°C	650	800	650	650	650
Min. air flow	l/min	400	350	400	400	550
Max. air flow at 20°C	l/min	940	800	930	960	950
Max. temperature by max. air flow	°C	260	520	440	480	630
Static pressure	Pa	450	450	450	450	450
Air outlet	∅ mm	62	62	62	62	62
Measurements	mm (l x w x h)	322 x 138 x 180	360 x 138 x 180	322 x 138 x 180	360 x 138 x 180	360 x 138 x 180
Weight incl. cable	kg	2,8	3,1	2,8	3,1	3,1
Protection category II		☐				
Conformity marking		CE				

Standard equipment

- Variable temperature setting
- Variable air-flow setting
- Main switch that can be locked separately for heating and fan
- Integrated tool protection

Accessories

Order no.	Description
5107245	Round nozzle (∅ 62 mm) ∅ 40 mm
5107246	Connection flange ∅ 62 mmV
5107259	Wide slot nozzle (∅ 62 mm) 150x12 mm
5107260	Wide slot nozzle (∅ 62 mm) 85x15 mm
5107262	Wide slot nozzle (∅ 62 mm) 300x4 mm
5106177	Reflector 50x400 mm, for shrink capsules, with collateral flange
5107248	Stainless steel filter

Special version

- External controller for heat (analog or digital)
- External controller for air flow (analog or digital)
- Analysis of motor speed
- Integrated thermocouple
- Integrated digital controller

Special accessories and external control are available on request.

Equipment with different voltage and wattage are available on request.